

PROJECT facts

Power Plant Improvement
Initiative (PPII)

09/2004

U.S. DEPARTMENT OF ENERGY
OFFICE OF FOSSIL ENERGY
NATIONAL ENERGY TECHNOLOGY LABORATORY



DEMONSTRATION OF A FULL-SCALE RETROFIT OF THE ADVANCED HYBRID PARTICULATE COLLECTOR (ADVANCED HYBRID™) TECHNOLOGY

CONTACT

U.S. Department of Energy
National Energy Technology
Laboratory

Kenneth E. Markel, Jr.
Director, Office of Major
Demonstration Projects
304-285-4364
304-285-4292 fax
kenneth.markel@netl.doe.gov

John Rocky
Project Manager
304-285-4711
304-285-4638 fax
john.rocky@netl.doe.gov

PARTICIPANT

Otter Tail Power Company
Big Stone City, SD

LOCATION

Otter Tail Power's Big Stone
Power Plant
Big Stone City, SD

TOTAL PROJECT FUNDING


\$13,353,288

COST SHARE

DOE	\$6,490,585
Participant	\$6,862,703 (51%)

Description

This project will demonstrate the Advanced Hybrid™ technology that was originally developed by UND/EERC, and subsequently tested on a 2.5 MWe slipstream at Otter Tail's Big Stone Plant near Milbank, SD. This research was supported by the Innovations for Existing Plants component of the DOE Fossil Energy Coal R&D Program. The Advanced Hybrid™ technology consists of fabric filter bags interspersed with perforated electrostatic precipitator (ESP) plates and electrodes in the same housing. The filter bags can achieve greater collection of very fine particles than can the ESP plates, while the ESP plates can capture dust that is re-entrained due to back-pulsing of the fabric filter bags. The combination of these two technologies (ESP and filtration) in the patented Advanced Hybrid™ uses the ESP portion to capture the bulk (as much as 90%) of the particles and allows the filter bags to be made out of highly efficient membrane materials because of a reduction in filtration surface required as compared to conventional pulse-jet type fabric filters. As such, it is anticipated that the particulate control device can operate at 2.5 - 4 times the throughput of conventional fabric filters. This technology offers the potential to increase fine particle (PM 2.5) collection efficiency by one or two orders of magnitude (i.e., 99.99% to 99.999% removal), at a cost that is roughly comparable to conventional particulate control technology.

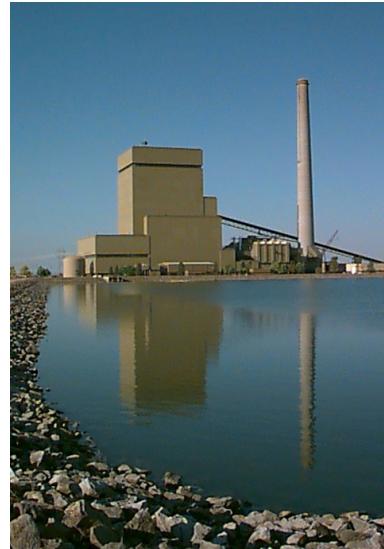

450 MW Big Stone Power Plant



Full Scale Advanced Hybrid™ Retrofit at Big Stone



DEMONSTRATION OF A FULL-SCALE RETROFIT OF THE ADVANCED HYBRID PARTICULATE COLLECTOR (ADVANCED HYBRID™) TECHNOLOGY

ADDITIONAL TEAM MEMBERS

Montana-Dakota Utilities and NorthWestern Public Service

(co-owners of Big Stone Power Plant)

W.L. Gore & Associates, Inc.
(licensee and filter bag supplier)

University of North Dakota Energy and Environmental Research Center
(concept developer)

ESTIMATED PROJECT DURATION

36 months

CUSTOMER SERVICE

800-553-7681

WEBSITE

www.netl.doe.gov

Benefits

A 450 MW demonstration is being conducted on a cyclone boiler firing coal from Wyoming's Powder River Basin (PRB). PRB coal, although not characteristic of eastern coals, produces fly ash that is among the most difficult to collect with ESPs. Seventy-five percent of the existing ESPs on U.S. coal-fired utilities are over 20 years old, and many are operating with marginal performance. There are a growing number of power plant deratings occurring because the existing ESP cannot operate efficiently and effectively at peak load. The present performance of these ESPs limits the type of fuel that can be burned in the boiler. Challenging PRB coals, which are often less expensive and contain significantly lower amounts of sulfur, in many cases cannot be burned because existing ESPs cannot effectively capture the high-resistivity dust that is generated. The Advanced Hybrid™ technology, with its superior collection of fine particulate in a cost-effective, compact-sized device, can potentially capture a portion of the ESP upgrade market.

In addition (although not part of this demonstration project), the Advanced Hybrid™ technology can provide the control of heavy metals. Generally, heavy metals are directly condensed or adsorbed onto particles in the power plant gas stream. Since fine particles have a much greater surface area than larger particles, for the same amount of mass, they adsorb a greater percentage of these heavy metals. The Advanced Hybrid™ technology's superior capture of fine particles will effectively control emissions of heavy metals that are not substantially in the vapor phase. Those elements in the vapor phase (e.g., mercury and selenium) will require sorbents. It is expected that the Advanced Hybrid™ system will be compatible with any of the proposed sorbents for mercury control.

Advanced Hybrid™ Filter Concept

